

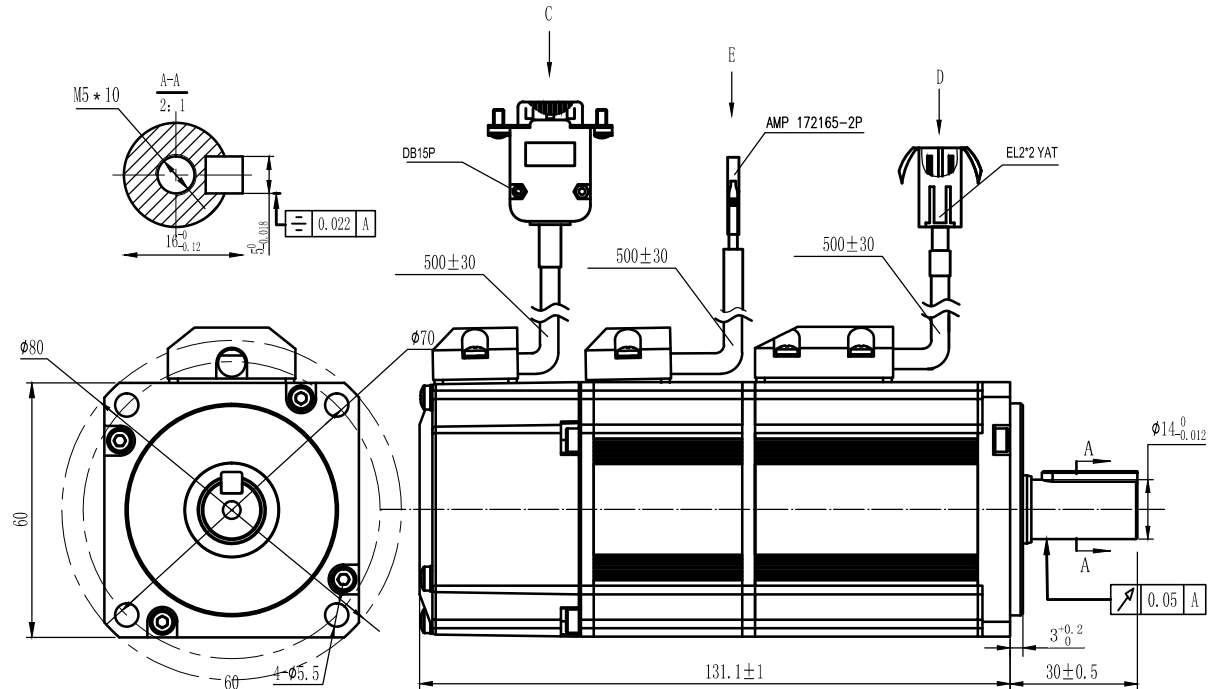



Rated voltage (VDC)	24
Rated power (W)	200
Rated torque (N.m)	0.64
Max torque (N.m)	1.92
Rated speed (rpm)	3000
Max speed (rpm)	4000
Rated current (A)	11
Max current (A)	33
Torque constant (N.m/A)	0.068
Back EMF constant (mV/rpm)	3.9
Inertia(kg*m ² *10 ⁻⁴)	0.21
Resistance(Ω)	0.2
Inductance(mH)	0.23
Motor poles	10
Encoder	1000lines
Encoder cable	26AWG
Power cable	18AWG
Protection level	IP54


Type	DB15 Male of Encoder connector									
Pin	1	2	3	4	5	6	9	11	12	13
Defi	A+	B+	GND	V+	U+	PE	W+	A-	B-	+5V
Color	Green	White	Black	Orange	Brown	Shield	Gray	Green/black	White/black	Red

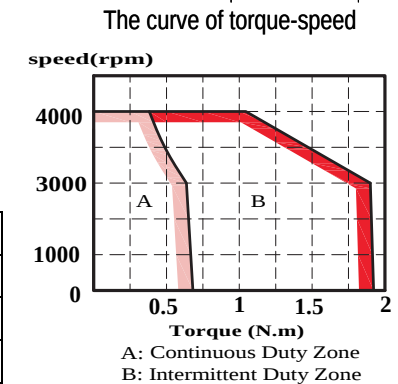

Type	Brake Connector	
Defi	1	2
Color	GND	DC24V



Type	Power connector			
Pin	1	2	3	4
Defi	U	V	W	FG
Color	Red	Blue	Black	Yellow/green



Leadshine Technology Co .Ltd

ELD6020V24GL-A5

200w servo motor with 1000 lines encoder