



10V



Rated voltage (VDC)	36
Rated power (W)	200
Rated torque (N.m)	0.61
Max torque (N.m)	1.91
Rated speed (rpm)	3000
Max speed (rpm)	4000
Rated current (A)	7
Max current (A)	21
Torque constant (N.m/A)	0.0915
Back EMF constant (mV/rpm)	6.19
Inertia(kg*m ² *10 ⁻⁴)	0.21
Resistance(Ω)	0.39
Inductance(mH)	0.55
Motor poles	10
Encoder	17 Bit
Encoder cable	28AWG
Power cable	18AWG
Protection level	IP54

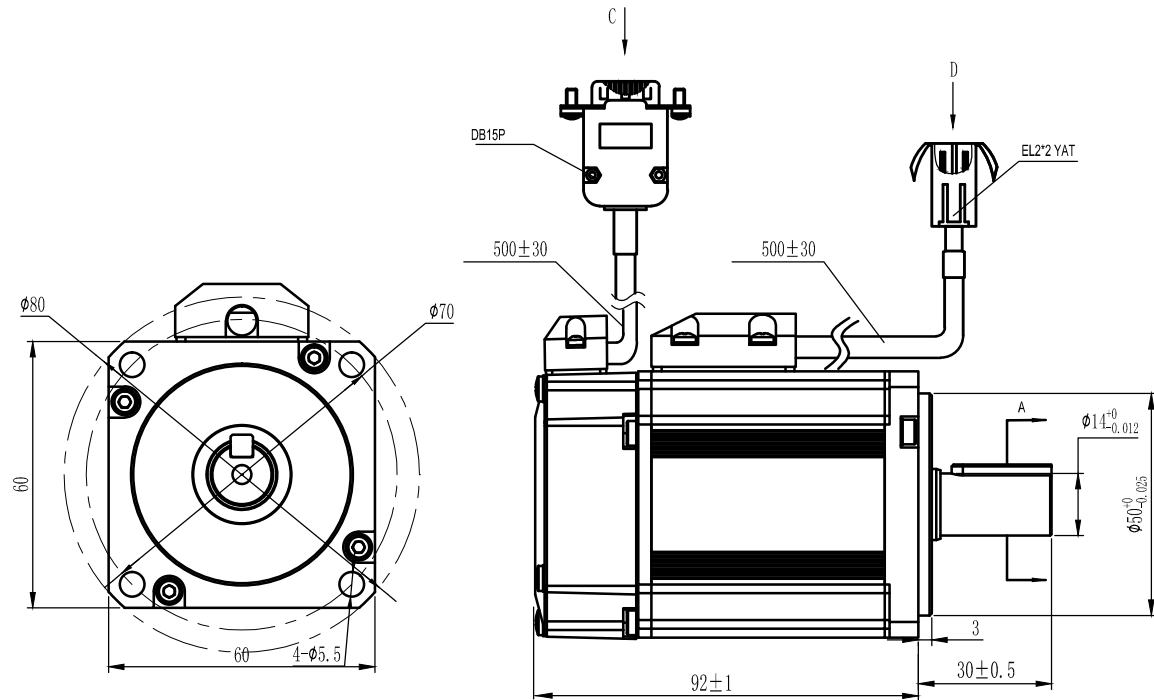

Type	DB15 Male of Encoder connector				
Pin	3	6	9	10	13
Defi	GND	PE	V+	V-	5V
Color	GND	PE	Grey	Grey/bk	Red



Type	Power connector			
Defi	U	V	W	FG
Color	Red	Blue	Black	Yellow/green



Leadshine Technology Co .Ltd

ACM6020V36H-E5

200w servo motor with 17 bit encoder